



**IMPLEMENT  
TIRES**



# IMPLEMENT TIRES



## AW 711



AW 711 is an implement radial tire specially designed for modern farming, and suitable for general purpose applications. Thanks to its special tread compound, the AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (Index)	Version
		Rec.	Alt.						
<b>16.5"</b>									
<b>265/70 R 16.5</b> (10 R 16.5)	134 A8/B	8.25	-	264	773	-	-	-	SR
<b>305/70R16.5</b> (12 R 16.5)	148 A8/B	9.75	-	325	851	-	-	-	SR
<b>340/60 R 16.5</b>	145 A8/B	11	-	324	820	368	2476	390	SR
<b>380/55 R 16.5</b>	150 A/B	12	11.75	360	830	372	2500	390	SR
<b>395/55 R 16.5</b>	152 A8/B	12	-	394	838	-	-	-	SR
<b>17"</b>									
<b>VF 480/45 R 17</b>	167 A8/B	16.00	-	491	866	363	2606	410	SB
<b>18"</b>									
<b>IF 340/65 R 18</b>	153 A8/B	W 11	-	330	899	-	-	-	SR
<b>400/60 R 18</b>	159 A8/B	14	13	394	945	419	2807	450	SR
<b>440/55 R 18</b>	159 A8/B	14	13	410	945	432	2893	450	SR
<b>19.5"</b>									
<b>15 R 19.5</b>	139 D	11.75	12.75	389	1019	452	3055	475	SR

SR: Stubble Resistant

SB: Steel Belted



## AW 702



AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>12"</b>											
7.00 - 12	4.25	-	185	665	295	1948	STD	6	TL	95 A8	-
7.00 - 12	4.25	-	185	665	295	1948	AB	6	TL	95 A8	-
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8	-
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	121 A8	-
10.0/80 - 12	9.00	7.0	264	710	313	2080	AB	10	TL	121 A8	-
10.0/80 - 12	9.00	7.0	264	710	313	2080	SPL	10	TL	121 A8	-
<b>15.3"</b>											
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	8	TT	119 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TT	123 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	123 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TT	126 A8	-

STD: Standard  
AB: Aramid Belted  
SPL: Special

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## AW 702



CUT & CHIP  
RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



FREE ROLLING  
APPLICATION



HIGH PUNCTURE  
RESISTANCE

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15.3"											
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	126 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TT	130 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	130 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	SPL	14	TL	130 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	135 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	HD	18	TL	135 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	22	TL	137 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TT	131 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	131 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TT	135 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	135 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	139 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TT	139 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	AB	14	TL	139 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	141 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	141 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TT	143 A8	-

STD: Standard  
SPL: Special  
HD: Heavy Duty  
AB: Aramid Belted





## AW 702



AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>15.3"</b>											
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	143 A8	-
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TT	142 A8	-
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	142 A8	-
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	14	TT	142 A8	-
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TT	144 A8	-
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	18	TL	146 A8	-
<b>16"</b>											
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	6	TT	95 A8	-
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	6	TL	95 A8	-
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	8	TT	103 A8	-
10.50 - 16	6.00 T	-	305	975	445	2986	STD	14	TT	-	-
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	10	TT	123 A8	-

STD: Standard  
SPL: Special

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## AW 702



CUT & CHIP  
RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



FREE ROLLING  
APPLICATION



HIGH PUNCTURE  
RESISTANCE

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
16"											
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	10	TL	123 A8	-
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	SPL	10	TL	123 A8	-
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	14	TT	130 A8	-
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	14	TL	130 A8	-
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	IND	14	TL	130 A8	-
13.0/55 - 16	11.0	-	336	770	345	2256	STD	12	TL	130 A8	-
13.0/55 - 16	11.0	-	336	770	345	2256	STD	14	TL	133 A8	-
13.0/55 - 16	11.0	-	336	770	345	2256	STD	18	TL	138 A8	-
13.0/75 - 16	11.0	9; W 9; W 11	340	890	396	2726	STD	10	TL	135 A8	-

STD: Standard  
SPL: Special  
IND: Industrial







## AW 702



AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
18"											
10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	10	TL	131 A8	-
10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	14	TL	138 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	STD	10	TL	139 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	STD	12	TL	142 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	STD	14	TL	145 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	14	TL	145 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	STD	16	TL	148 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	16	TL	148 A8	-
12.5/80 - 18	W 9	11	308	965	432	2827	STD	18	TL	150 A8	-
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TT	141 A8	-
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TL	141 A8	-
13.0/65 - 18	11.0	-	336	890	398	2608	STD	16	TL	144 A8	-
14.5/80 - 18	11.0	12; 13	362	1047	446	3068	STD	12	TT	155 A8	-

STD: Standard  
SPL: Special

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## AW 705



AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a “special” version, which offers improved durability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
16"											
14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TT	134 A8	-
14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TL	134 A8	-
14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TT	142 A8	-
14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TL	142 A8	-
17"											
15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	10	TL	134 A8	-
15.0/55 - 17	13.00	13; W 13	391	850	377	2490	SPL	10	TL	134 A8	-
15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	12	TL	138 A8	-
15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	14	TL	141 A8	-
15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	18	TL	146 A8	-

STD: Standard  
SPL: Special







## AW 705



AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a "special" version, which offers improved durability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	
	Rec.	Alt.										
18"	15.0/70 - 18	13.00	13; W 13	391	990	442	2901	STD	12	TL	145 A8	-
	15.0/70 - 18	13.00	13; W 13	391	990	442	2901	STD	14	TL	148 A8	-
	15.0/70 - 18	13.00	13; W 13	391	990	442	2901	STD	16	TL	151 A8	-
20"												
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TT	151 A8	-
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TL	151 A8	-
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TT	154 A8	-
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TL	154 A8	-
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	SPL	14	TL	154 A8	-
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	16	TL	156 A8	-
22.5"												
	400/55 - 22.5	AG 11.75	12.25; AG 13.00	405	1016	443	3072	STD	18	TL	154 A8	-

STD: Standard  
SPL: Special

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## AW 708



AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers. It is ideal for modern farming both on and off the road.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>15.5"</b>											
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	136 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TT	145 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	145 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	18	TL	149 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	HD	18	TL	149 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	SPL	18	TL	149 A8	-
<b>17"</b>											
19.0/45 - 17	16.00	-	491	866	380	2536	STD	10	TL	138 A8	-
19.0/45 - 17	16.00	-	491	866	380	2536	STD	14	TL	144 A8	-
19.0/45 - 17	16.00	-	491	866	380	2536	STD	18	TL	148 A8	-
19.0/45 - 17	16.00	-	491	866	380	2536	SR	22	TL	152 A8	-
500/50 - 17	16.00	-	500	945	416	2750	STD	10	TL	140 A8	-
500/50 - 17	16.00	-	500	945	416	2750	STD	14	TL	149 A8	-
500/50 - 17	16.00	-	500	945	416	2750	STD	16	TL	152 A8	-
500/50 - 17	16.00	-	500	945	416	2750	STD	18	TL	154 A8	-
500/65 - 17	16.0	-	520	1070	462	3135	STD	18	TL	160 A8	-

STD: Standard  
HD: Heavy Duty  
SPL: Special  
SR: Stubble Resistant





## AW 726



AW 726 has been specially designed for trailers and hay harvesters/balers in transport and soil tillage operations. It is best suited for both on-and-off-the-road usage. AW 726 shows excellent road performance, driving comfort and self-cleaning features. The low rolling resistance contributes to better fuel economy.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>15.3"</b> 11.5/80 - 15.3	9.00	-	300	855	-	-	STD	14	TL	139 A8	126 A8
<b>15.5"</b> 400/60 - 15.5	AG 13.00	-	400	875	-	-	STD	18	TL	149 A8	137 A8

STD: Standard



## AW 909



AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>12"</b> 10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8	-
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	121 A8	-
<b>15.3"</b> 10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	123 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	126 A8	-
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	130 A8	-

STD: Standard

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# IMPLEMENT TIRES



## AW 909



AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>15.3"</b>											
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	135 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	131 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	135 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	139 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	141 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	141 A8	-
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	143 A8	-
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	142 A8	-
<b>17"</b>											
15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	134 A8	-
15.0/55 - 17	13.00	13	391	850	377	2490	STD	12	TL	138 A8	-
15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	141 A8	-

STD: Standard







## AW 09



AW 09 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. AW 09 is the right tire to be used in all operating conditions which require excellent handling features.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>15.3"</b>											
260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	122 A8	110 A8
260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	126 A8	114 A8
260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	131 A8	119 A8
300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	132 A8	120 A8
300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	138 A8	126 A8
300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	141 A8	129 A8
320/80 - 15.3	9.00	-	309	901	392	2640	STD	-	TL	145 A8	133 A8
<b>15.5"</b>											
400/60 - 15.5	AG 13.00	-	404	874	382	2561	STD	-	TL	145 A8	132 A8
<b>17"</b>											
380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	138 A8	125 A8
380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	141 A8	128 A8

STD: Standard

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## BK 4040



BK 4040 is specifically designed for agricultural implements and trailers. Its aggressive lug pattern provides excellent traction. The strong casing ensures best wear resistance. BK 4040 features a wide contact patch providing outstanding grip and stability.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
16" 6.50 - 16	4.50 E	-	182	740	-	-	STD	10	TT	-	-
7.00 - 16	5.50	5.00 F	198	770	-	-	STD	12	TT	-	-

STD: Standard




## RIB IMPLEMENT (A)



RIB IMPLEMENT (A) has been engineered for trailers and implement machinery in transport and soil tillage applications. It is ideal for modern farming and shows top performance both on and off the road. RIB IMPLEMENT (A) is the right choice for all operating conditions which require a high level of handling as well as reduced soil compaction to preserve the crops.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
12" 10.0/80 - 12	9.00	7.0	264	746	329	2186	STD	6	TL	110 A8	-

STD: Standard

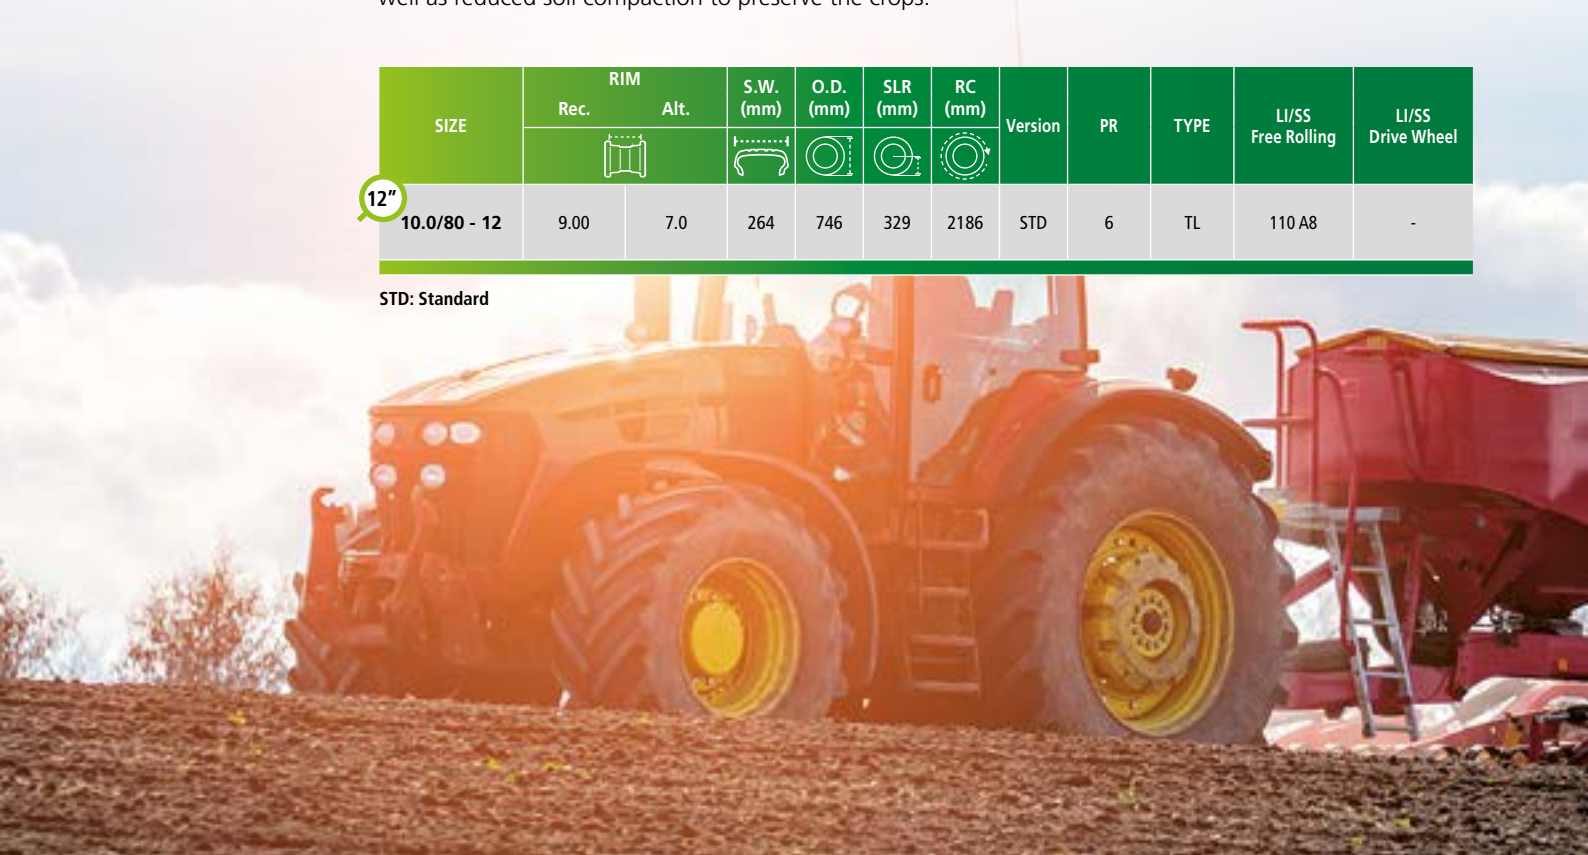





## RIB IMPLEMENT (B)



RIB IMPLEMENT (B) has been specially designed for agricultural implements. This ideal tire for modern farming is made of a stubble-resistant compound providing excellent puncture protection. RIB IMPLEMENT (B) is a 5-rib tread pattern tire featuring a strong casing for a longer service life. It is the right choice for all operating conditions, which require high load capacity along with low rolling resistance.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>17"</b> 49 - 17	13.0	14.0	425	1200	-	-	STD	20	TL	158 A8/154 B	146 A8/143 B

STD: Standard



## RIB 713



RIB 713 is a steel-belted tire for agricultural implements. As a response to the increasing awareness of low soil compaction in modern farming, RIB 713 has been designed with IF technology. This enables the tire to carry heavier loads at lower inflation pressures and provides a larger footprint with uniform weight distribution. The steel-belted structure provides excellent puncture resistance and hence increased protection against stub penetration and relative damages, even if running into strong stubble. In addition, "D" speed rating (65 km/h - 40 mph) allows for fast road transfers. RIB 713 is BKT's contribution to maximize both the productivity and efficiency of your farming business.

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (Index)	Version
		Rec.	Alt.						
<b>15"</b> IF 240/80 R 15	129 D	W 8	-	240	765	354	2324	360	SR
IF 265/85 R 15 (10.5L R15)	121 D	W 8	-	260	831	368	2502	-	SR
IF 280/70 R 15	128 D	W 8	-	279	779	347	2356	360	SR
IF 320/70 R 15	146 D	W10	-	320	823	367	2590	-	SR

SR: Stubble Resistant

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# IMPLEMENT TIRES



## RIB 774 (A)



RIB 774 (A) is a low section implement tire offering high load capacity with minimum soil compaction. It is ideal for modern farming and suitable for on- and off-the-road applications.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>17"</b> 15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	134 A8	-
15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	141 A8	-

STD: Standard



## RIB 774 (B)



RIB 774 (B) is a low section implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>14.5"</b> 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	106 A8	-
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TL	106 A8	-
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	HD	10	TT	106 A8	-
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	113 A8	-
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	113 A8	-
250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	12	TL	119 A8	-
250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	14	TL	124 A8	-
<b>16"</b> 10.5/65 - 16	W 9	W 8 L	265	745	339	2183	STD	14	TT	130 A8	-
10.5/65 - 16	W 9	W 8 L	265	745	339	2183	IND	14	TT	130 A8	-
<b>18"</b> 12.0 - 18 (340/70 - 18)	11.0	-	342	902	414	2688	STD	16	TL	150 A8	-

STD: Standard  
IND: Industrial  
HD: Heavy Duty





## RIB 774 (C)



RIB 774 (C) is a low section and narrow width implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>17"</b> 19.0/45 - 17	16.00	-	455	845	387	2518	STD	10	TL	138 A8	-
<b>17.5"</b> 215/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	134 A8	-
215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	139 A8	-
225/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	134 A8	-
225/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	139 A8	-

STD: Standard



Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## RIB 775



RIB 775 is a low-section cross-ply tire for transport and soil tillage applications with trailers and implement machinery. It offers excellent handling as well as reduced soil compaction.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
12"											
300/65 - 12	9.0	-	305	685	304	2007	STD	8	TL	116 A8	-

STD: Standard



## RIB 900



RIB 900 is suitable for transport, soil tillage and hay harvesting operations with trailers, implement machinery and hay harvesters/balers. It offers excellent handling as well as reduced soil compaction.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15.5"											
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	139 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	145 A8	-
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	16	TL	147 A8	-

STD: Standard





## RIB MASTER



RIB MASTER is suitable for transport and soil tillage operations with trailers and implement machinery. This tire is ideal in all operating conditions that require excellent handling.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
17.5"											
215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	142 A8	-

STD: Standard



## FLOTATION RIB IMPLEMENT



FLOTATION RIB IMPLEMENT is a rib pattern tire for trailers in transport applications. It features high flotation capability and ensures significant fuel savings to boost the productivity of your business.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15"											
31 X 13.50 - 15	10 LB	-	360	780	359	2129	STD	12	TL	-	-

STD: Standard

# IMPLEMENT TIRES



## MULTI RIB



MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors, trailers, and implement machinery. It offers excellent handling throughout its long product life-cycle.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
16"											
11.00 - 16	W10 L	W 8; W 8 L	315	930	-	-	STD	12	TL	-	-
11.00 - 16	W10 L	W 8; W 8 L	315	930	-	-	AB HD	12	TL	-	-

STD: Standard

AB HD: Aramid Belted Heavy Duty

20



## AS 504



AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
12"											
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TT	84 A8	72 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TL	84 A8	72 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TT	93 A8	80 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TL	93 A8	80 A8
6.5/80 - 12	5 J	5 JA	163	588	273	1743	HD	6	TT	93 A8	80 A8

STD: Standard

HD: Heavy Duty





## AS 504



AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>12"</b>											
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TT	88 A8	75 A8
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TL	88 A8	75 A8
7.00 - 12	4.5	-	187	683	300	2001	STD	6	TL	95 A8	83 A8
7.00 - 12	4.5	-	187	683	300	2001	AB	8	TL	100 A8	88 A8
7.00 - 12	4.5	-	187	683	300	2001	SPL	8	TL	100 A8	88 A8
11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TT	114 A8	101 A8
11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TL	114 A8	101 A8
<b>15"</b>											
5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	4	TT	79 A8	67 A8
5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TT	88 A8	75 A8
5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TL	88 A8	75 A8

STD: Standard

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index

# IMPLEMENT TIRES



## AS 504



AGRI-INDUSTRIAL  
USE



SUITABLE FOR  
LOOSE SURFACE



TRACTION



SELF-CLEANING



CUT & CHIP  
RESISTANCE



HIGH PUNCTURE  
RESISTANCE



HEAVY DUTY SERVICE

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15"											
	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	6	TT	109 A8	97 A8
	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TT	113 A8	100 A8
	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TL	113 A8	100 A8
	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	AB HD	8	TL	113 A8	100 A8
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	HD	8	TT	113 A8	100 A8
15.3"											
	9.00	-	264	780	345	2285	STD	8	TT	119 A8	106 A8
	9.00	-	264	780	345	2285	STD	8	TL	119 A8	106 A8
	9.00	-	264	780	345	2285	IND	8	TL	119 A8	106 A8
	9.00	-	264	780	345	2285	STD	10	TL	123 A8	111 A8
	9.00	-	264	780	345	2285	STD	14	TL	130 A8	118 A8
	9.00	-	264	780	345	2285	STD	18	TT	135 A8	122 A8
	9.00	-	264	780	345	2285	STD	18	TL	135 A8	122 A8
	9.00	-	290	867	380	2540	STD	8	TT	126 A8	114 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	126 A8	114 A8

STD: Standard  
HD: Heavy Duty  
AB: Aramid Belted  
IND: Industrial







## AS 504



AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>15.3"</b>											
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	10	TL	131 A8	119 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	135 A8	123 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TL	135 A8	123 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	139 A8	126 A8
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	139 A8	126 A8
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	107 A8	95 A8
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	107 A8	95 A8
<b>16"</b>											
6.00 - 16	4.00 E	4.50 E; 4½ K	164	735	343	2190	STD	6	TT	95 A8	83 A8
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	6	TT	104 A8	92 A8
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TT	112 A8	99 A8
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TL	112 A8	99 A8
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	HD	8	TT	112 A8	99 A8
9.0/70 - 16	W 7	-	222	760	355	2285	STD	10	TL	119 A8	106 A8
270/75 - 16 (10.0/75 - 16)	9.00	-	250	810	-	-	STD	-	TL	123 A8	111 A8

STD: Standard  
HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index

# IMPLEMENT TIRES



## AS 504



AGRI-INDUSTRIAL  
USE



SUITABLE FOR  
LOOSE SURFACE



TRACTION



SELF-CLEANING



CUT & CHIP  
RESISTANCE



HIGH PUNCTURE  
RESISTANCE



HEAVY DUTY SERVICE

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<b>17"</b>											
15.0/55 - 17	13.00	13	380	890	395	2608	STD	10	TL	134 A8	122 A8
15.0/55 - 17	13.00	13	380	890	395	2608	STD	14	TL	141 A8	129 A8
19.0/45 - 17	16.00	-	465	865	389	2578	STD	14	TL	144 A8	131 A8
420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	142 A8	129 A8
420/55 - 17	13.00	-	430	910	407	2712	STD	16	TL	145 A8	133 A8
<b>18"</b>											
7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	6	TT	106 A8	94 A8
7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	8	TT	114 A8	101 A8
10.5/80 - 18	W 9	9; W 8	274	907	405	2657	STD	10	TL	131 A8	119 A8
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	12	TL	142 A8	129 A8
12.5/80 - 18	W 9	9; 11	308	987	438	2892	SPL	12	TL	142 A8	129 A8
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	16	TL	148 A8	135 A8
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	18	TL	150 A8	138 A8

STD: Standard  
SPL: Special







## AS 504



AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
<div>20"</div>											
7.50 - 20	5.50 F	4.50 E; 6.00 F; 5.00 F	209	904	422	2695	STD	8	TT	116 A8	103 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	10	TL	147 A8	135 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	12	TL	151 A8	139 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	14	TL	154 A8	142 A8
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	16	TL	156 A8	144 A8
400/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	IND	-	TL	-	-
<div>24"</div>											
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	10	TL	154 A8	142 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	12	TL	157 A8	145 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	14	TL	160 A8	148 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	160 A8	148 A8
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	16	TL	163 A8	151 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	10	TL	158 A8	146 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	12	TL	163 A8	151 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TT	168 A8	155 A8
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TL	168 A8	155 A8
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	-	-
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	-	-

STD: Standard  
SPL: Special  
IND: Industrial

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
LI/SS = Load Index / Speed Symbol;  
S.W. = Section Width; O.D. = Overall Diameter;  
SLR = Static Loaded Radius; RC = Rolling Circumference;  
SRI = Speed Radius Index



# IMPLEMENT TIRES



## AS 505



AS 505 is best suited for soil tillage operations with small tractors and implement machinery. It features excellent self-cleaning properties and increased traction on the ground, especially on muddy soil.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15" 6.5/80 - 15	5.0	4½ K; 5 K; 5 J	169	683	325	2106	STD	6	TL	98 A8	86 A8
6.5/80 - 15	5.0	4½ K; 5 K; 5 J	163	663	310	1976	STD	8	TL	104 A8	92 A8

STD: Standard







## AS 507



AS 507 is a field-oriented tire suitable for soil tillage with implement machinery. It features excellent self-cleaning properties and increased traction on the ground. The AS 507 "special" version offers even higher cut and chip resistance to face the most difficult operating conditions.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15"											
185/65 - 15	5.5	-	185	640	301	1894	STD	4	TL	89 A8	76 A8

STD: Standard



# IMPLEMENT TIRES



## AS 509



AS 509 has been specially designed for trailers, seeders and soil preparation machinery. Its tread pattern with a huge number of lugs provides a uniform weight distribution on the land. AS 509 ensures high load capacity at low inflation pressure, thus minimizing soil compaction and protecting crops.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
22.5"											
550/45 - 22.5	AG 16.00	-	540	1065	-	-	STD	20	TL	166 A8/162 B	154 A8/150 B

STD: Standard










## FARM 2000 (R-1)



The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
											
260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	126 A8	114 A8
300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	132 A8	120 A8
											
250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TT	125 A8	113 A8
250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TL	125 A8	113 A8
											
250/80 - 18	W 8	W7; W9	240	870	394	2566	STD	-	TT	127 A8	115 A8
250/80 - 18	W 8	W7; W9	240	870	394	2566	STD	-	TL	127 A8	115 A8

STD: Standard

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5%  
 LI/SS = Load Index / Speed Symbol;  
 S.W. = Section Width; O.D. = Overall Diameter;  
 SLR = Static Loaded Radius; RC = Rolling Circumference;  
 SRI = Speed Radius Index



# IMPLEMENT TIRES



## TR 882



TRACTION



HIGH FLOTATION  
CAPABILITY



AGRI-INDUSTRIAL  
USE



CUT & CHIP  
RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE  
RESISTANCE

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
15.5"											
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	134 A8	122 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	145 A8	132 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	145 A8	132 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	145 A8	132 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	145 A8	132 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	149 A8	137 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	149 A8	137 A8
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	149 A8	137 A8

STD: Standard  
AB: Aramid Belted  
HD: Heavy Duty  
SPL: Special





## SL 441



SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel
	Rec.	Alt.									
14.5" 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	106 A8	-
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	113 A8	-
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	113 A8	-

STD: Standard



### Corporate Office

**Balkrishna Industries Ltd.**

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India  
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

### BKT Europe srl

Viale Della Repubblica, 133  
20831 Seregno (MB), Italy  
Tel: (+39) 0362 33 03 28  
(+39) 0362 32 51 07  
Fax: (+39) 0362 23 24 72

### BKT USA Inc.

2660 West Market St. Suite 100  
Fairlawn (Akron) OH 44333, USA  
Tel: (+1) 330 836 1090  
Fax: (+1) 330 836 1091  
Toll Free: (+1) 888 660 0662

### BKT Tires (CANADA) Inc.

55 York Street, Suite 401  
Toronto, Ontario M5J 1R7, Canada  
Tel: AG/IND (+1) 905 641 5636  
OTR (+1) 780 888 5667  
Fax: (+1) 416 229 1711

**bkt-tires.com**

